
IN LINE FILTERS type 90110

EV METALVÆRK
EV HYDROGEN®

Operating pressure:	See table below
Temperature:	40°C to +120°C
Material body:	AISI316L
Filtration:	5 µm, 98 % filtration *)
Connections:	Cone and Thread connection
Tests:	EN12266-1 P10, 2250 bar water
Compliance:	PED (2014/68/EU), ASME B.31.3.

*) other filtration grades available upon request.

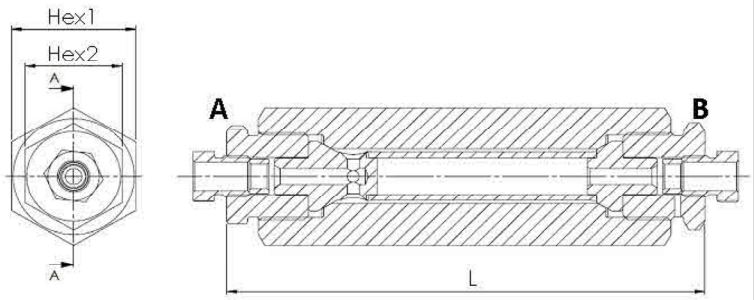

Recommended flowdirection: A to B

Cataloguenumber	SIZE ["]	L [mm]	Hex1 [mm]	Hex2 [mm]	Kv	Max. Pressure [bar]
90110 3/8	3/8"	158	41	32	0,65	1000
90110 9/16	9/16"	164	41	36	0,65	1000
90110 3/4	3/4"	278	60	50	1,3	1000
90110 1	1"	298	60	50	1,3	1000

Datasheet subject to change without notice

Revision 4